


EPA Tier 1 / Tier 2 / CARB Solutions Setting Higher Standards

Benefits:

- ► DEUTZ Quality & Performance
- ► Comprehensive Range of Engine Speeds
- FM Approved & UL Listed
- ► Meets NFPA-20 Requirements
- ► Factory Designed & Developed
- ► Global Service Network & Coverage
- ► Factory Authorized Start-Up Inspection
- ► Three-Year Limited Engine Warranty
- ► EPA Tier 2/CARB Ratings Available



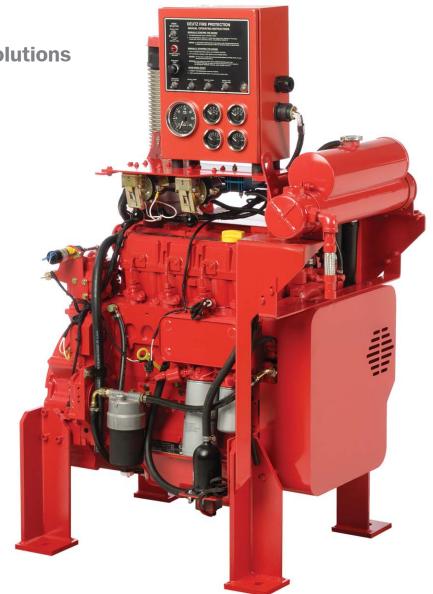



▶ Engine Specifications

Engine Model	DFP 2011 series	DFP 2012 series	DFP 1013 series		
Cooling medium	Oil-cooled	Water-cooled	Water-cooled		
Aspiration	Turbocharged	Turbocharged only and Turbocharged with Charge-Air-cooling	Turbocharged with Charge-Air-cooling		
HP Range	45 to 81 HP	80 to 225 HP	185 to 288 HP		
Displacement	3.1 liters	4.0 - 6.0 liters	7.2 liters		
Number of cylinders	4	4 and 6	6		

► Technical Data

Engine Model	Certified Horsepower @ RPM							
	1470	1800	2100	2350	2650	2800	3000	
DFP4 2011 T10*		45	55	60	60	72	72	
DFP4 2011 T20*	51	69	71	72	78	81	81	
DFP4 2012 T10	80	96	105	111	111	95		
DFP4 2012 C10	95	117	135	145	147	146		
DFP6 2012 T10	124	152	171	168	159	156		
DFP6 2012 C10	149	177	205	207	206	225		
DFP6 1013 C10	185	225	250	250	250			
DFP6 1013 C20	221	288	279	286	278			


^{*}FM Approved only


Dimensions


Engine Series		Α	В	С	D	E	F
DFP4 2011 T	in	56.6	30.4	16.6	24.8	14.5	14.8
DFP4 2012 T	in	58.6	37.0	15.0	29.8	26.5	24.0
DFP4 2012 C	in	58.6	37.4	15.0	29.8	26.5	24.0
DFP6 2012 T	in	58.5	46.4	15.0	33.7	35.5	24.0
DFP6 2012 C	in	58.6	46.1	15.0	35.0	35.5	24.0
DFP6 1013 C	in	61.0	51.1	15.0	34.3	40.2	24.0

► Model Designation

DFP4 2011 T10

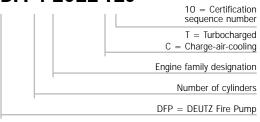

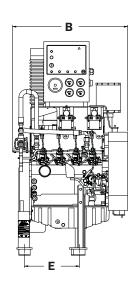

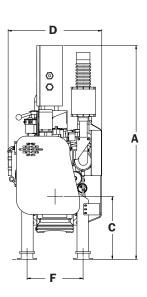

U.S. EPA | Tier 2 / CARB* Ratings

▶ Engine Specifications

Engine Model	DFP 2012 series	DFP 1013 series Water-cooled Turbocharged with Charge-Air-cooling		
Cooling medium	Water-cooled			
Aspiration	Turbocharged only and Turbocharged with Charge-Air-cooling			
HP Range	80 to 225 HP	185 to 288 HP		
Displacement	4.0 - 6.0 liters	7.2 liters		
Number of cylinders	4 and 6	6		

► Technical Data

Engine Model	Certified Horsepower @ RPM							
	1470	1800	2100	2350	2650	2800	3000	
DFP4 2012 T15	80	96	100	100	100	95		
DFP4 2012 C15	95	117	135	145	147	146		
DFP6 2012 C15	149	177	205	207	206	225		
DFP6 1013 C15	185	225	250	250	250			
DFP6 1013 C25	221	288	279	286	278			

^{*} EPA Tier 2; Complies with California ATCM 93115.6(a)(4)

Dimensions

Engine Series		Α	В	C	D	E	F
DFP4 2012 T	in	58.6	37.0	15.0	29.8	26.5	24.0
DFP4 2012 C	in	58.6	37.4	15.0	29.8	26.5	24.0
DFP6 2012 T	in	58.5	46.4	15.0	33.7	35.5	24.0
DFP6 2012 C	in	58.6	46.1	15.0	35.0	35.5	24.0
DFP6 1013 C	in	61.0	51.1	15.0	34.3	40.2	24.0

Model Designation

DFP4 2012 T15

